

PALE WOOD

LVT (Glue Down)

Size: 186mm x 940mm
Thickness: 3mm
Origin: Korea
Packing: 19 pcs (3.32m²) / box

GoldTile Master



MTW 4481



MTW 3011



MTW 4486




MTW 3021




MTW 3012

GoldTile Classic

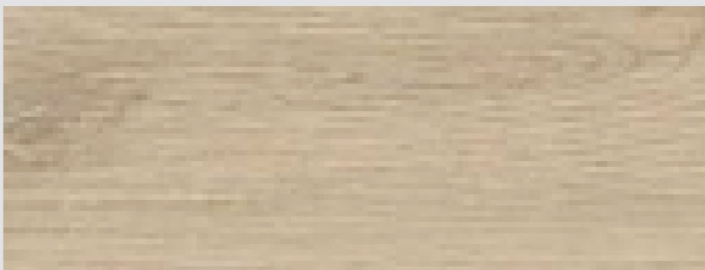

GWT 3521

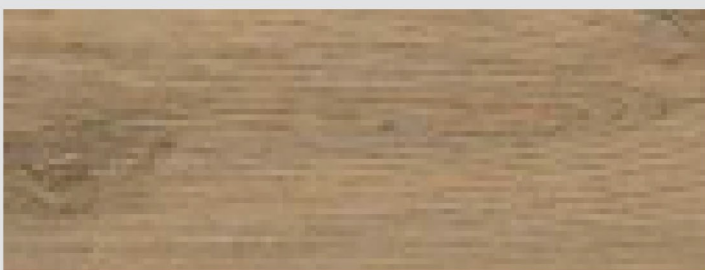

GWT 3522

WIDE WOOD

Size: 177.8mm x 1220mm
Thickness: 3mm
Packing: 15 pcs (3.25m²/box)



(Light colour part)



(Dark colour part)

GWT 9060



► Variation on dark and light colours gradation.



* Due to technical reasons, colours and patterns may vary slightly from product samples.

Application Commercial areas | Offices | Retails | Restaurants | Schools

Key Features



Eco-friendly



Antibacterial



Easy maintenance



High Durability

Storage Cartons should be evenly stacked on a flat surface.

Before installation Allow flooring materials to acclimatize the room temperature for minimum 48 hours before installation. Subfloors must be level, flat, clean and free from marks.

During installation Do not allow traffic for 24 hours after installation. Stains can be removed by alcohol. Do not use strong solvents to clean products.

After installation Do not install on top of the existing floors such as plywood underlayment. Make sure all products are from same LOT number in order to minimize shade variation.

Precautions for maintenance and usage

경고 (Warning)



- Water, oil, sand..etc. may cause slippery. Please remove them immediately.
- Especially elderly and pregnant women should aware when wearing socks or with wet feet.
- Do not use interior varnish to the floor as it may cause slippery.



- When using a water steam cleaner or electric heater, please aware that it may cause decolorize or deformation.



- While using solvent-type adhesives, please provide sufficient ventilation to prevent health care problems and fires caused by organic solvents.

주의 (Caution)



- After installation, there may have smell of the material or adhesive, please allow the area be ventilated sufficiently.



- Do not use strong solvent such as acetone or thinner to clean product surface. Use alcohol instead.



- Toxic gas will be generated when the residue is combusted.
- Please ensure to dispose to a licensed industrial waste company to handle the wastage.



- If chemicals such as bleaches or dyeing are dropped, chemical components can penetrate onto the floor material and become coloured.



- Install a blind curtain to block the sunlight prevent exposing directly, the shrinkage and decolorization.



- Remove the dust from the subfloor.



- Please install the floor after drying the surface.



- Please ensure to install with designated adhesive.

Key information

Item	Standard Test Method	Requirement
Volatility	BS-EN-664-1995	Max. 10g / m ²
Flexibility	ASTM F137-08	1 inch mandrel no cracks or breaks in face or back
Resistance to Chemicals	ASTM F925-02	Max. slight change
Peel Resistance	EN 431-1994	Min. 50N / 50mm
Anti-Bacterial	ASTM E2180-07	Get the reduction closed to 99.9%
Anti-Fungi	ASTM G21-09	Need to reach Grade 0
Composition of Material	ASTM F1700	±0.016 in./lin. Ft (±0.4mm / 305mm)
Resistance to Heat / Light	ASTM F1514 / ASTM F1515	Max. ΔE < 8 avg.